

THE LINE LED.

innovation



Hassle-Free | Easy Installation

Seamless Lighting

Cost & Time Saving



Can connect up to
1000W
limitless designs



THE LINE LED

Anti-glare | Uniform Lights
High Brightness LED
No Screw, No Dot, No Dark Area

Specification

Aluminium | Polystyrene

20W

60 x 5 x 5 cm.
2,400lm

40W

120 x 5 x 5 cm.
4,800lm

תאורת
מסלולית




>80
CRI

170
265V




120°

Kit for THE LINE LED



VL-23-KIT-RECESSED

Hanging Board x 1
5*80 Machine Inro x 2
M5*5 Flange Frame x 2



VL-23-KIT-SURFACE

Board x 2
Screw Bag x 1



VL-23-KIT-HANGING

Roty Head x 2
1.5m Steel Cable Lagging x 2
7*15MM x 2
60 Cover x 2
Screw Accessories Package x 1



VI-23-CONNECT-X-10.5W

10.5W	Power
18.1 x 18.1 x 5.8 cm.	Dimension
1.050lm	Luminous Flux
>80	CRI
120°	Beam Angle
170-265V	Input Voltage
>0.9	Power Factor



- 4 copper locks x 1
- Rally Head x 1
- 1.5m Steel Cable Lagging x 1
- 0.5m Steel Cable Headed on both sides +7*15M4*4
- 60 Cover x 1
- Screw Accessories Package x 1
- Hanging Board x 4



VI-23-CONNECT-T-8.5W

8.5W	Power
18.1 x 11.6 x 5.8 cm.	Dimension
850lm	Luminous Flux
>80	CRI
120°	Beam Angle
170-265V	Input Voltage
>0.9	Power Factor



- 2 copper locks x 1
- Rally Head x 1
- 1.5m Steel Cable Lagging x 1
- 0.5m Steel Cable Headed on both sides +7*15M4 x 2
- 60 Cover x 1
- Screw Accessories Package x 1
- Hanging Board x 2



VI-23-CONNECT-I-6.5W

6.5W	Power
11.6 x 11.6 x 5.8 cm.	Dimension
650lm	Luminous Flux
>80	CRI
120°	Beam Angle
170-265V	Input Voltage
>0.9	Power Factor



- copper locks x 1
- Rally Head x 1
- 1.5m Steel Cable Lagging x 1
- 0.5m Steel Cable Headed on both sides +7*15M4 x 2
- 60 Cover x 1
- Screw Accessories Package x 1
- Hanging Board x 2

Multiple Wire Plug



XT1 Three-Wire PC Plug, 18AWG over UL,
wire length **30cm**, outer strip 40mm, inner strip 10mm,
ground wire is yellow-green, in line with ROHS



XT1 Three-Wire PC Plug, 18AWG over UL,
wire length **150cm**, outer strip 40mm, inner strip 10mm,
ground wire is yellow-green, in line with ROHS



XT1 three-wire PC **double plug**, 18AWG over UL,
wire length **200cm**, the ground wire is yellow-green,
in line with ROHS

LED



VL-23-LINEA-LED36W30

VL-23-LINEA-LED36W40

Power	36W	
Dimension	10 x 120 x 4 cm.	
CCT	3000K (ilavoošu)	4000K (ilavuda)
Luminous Flux	3,060lm	
No. LED	192	
CRI	>82	
Beam Angle	120°	
Input Voltage	165-265V	
Power Factor	>0.5	

Surface mounted




Hanging



Office Light.

Material : Steel | Polystyrene

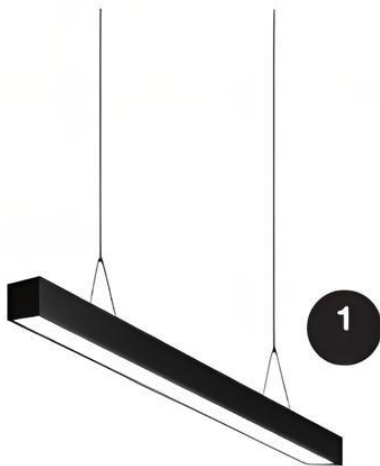


VL-23-LINEA-1T8-120-BK

T8 x 1



VL-23-LINEA-2T8-120-BK

T8 x 2



	Unit of cm.		
	W	L	H
1T8	0.9	124	7
2T8	12	124	7