

In Ground Uplight.

“

Ground Uplight is suitable for residences, hotels, and restaurants. Most commonly used in outside areas. Whether it's looking at the old wall Or as a walkway light at night, set the atmosphere with soft lighting to help create warmth. Make the house livable and full of life

”

Ø63



8.4

3.5



VL-13-6642+8/ST

LED 11W 80LM 3000K
CRI90 20,000Hrs
Ø63 cm.

13.

MR16 GU5.3

Material : **Stainless | Tempered Glass**

IP67



VL-13-6554+B/G5.3
VL-13-6554+B/GU-10
⌀ 10 cm.

VL-13-6575+B
⌀ 10 cm.

VL-13-6601+B
⌀ 12.4 cm.

IP65

Material : **Aluminium | Tempered Glass**




VL-13-5207/1
⌀ 9.6 cm.

VL-13-5208/2
⌀ 9.6 cm.

VL-13-5107/1
⌀ 11.7 cm.

VL-13-5108/2
⌀ 11.7 cm.

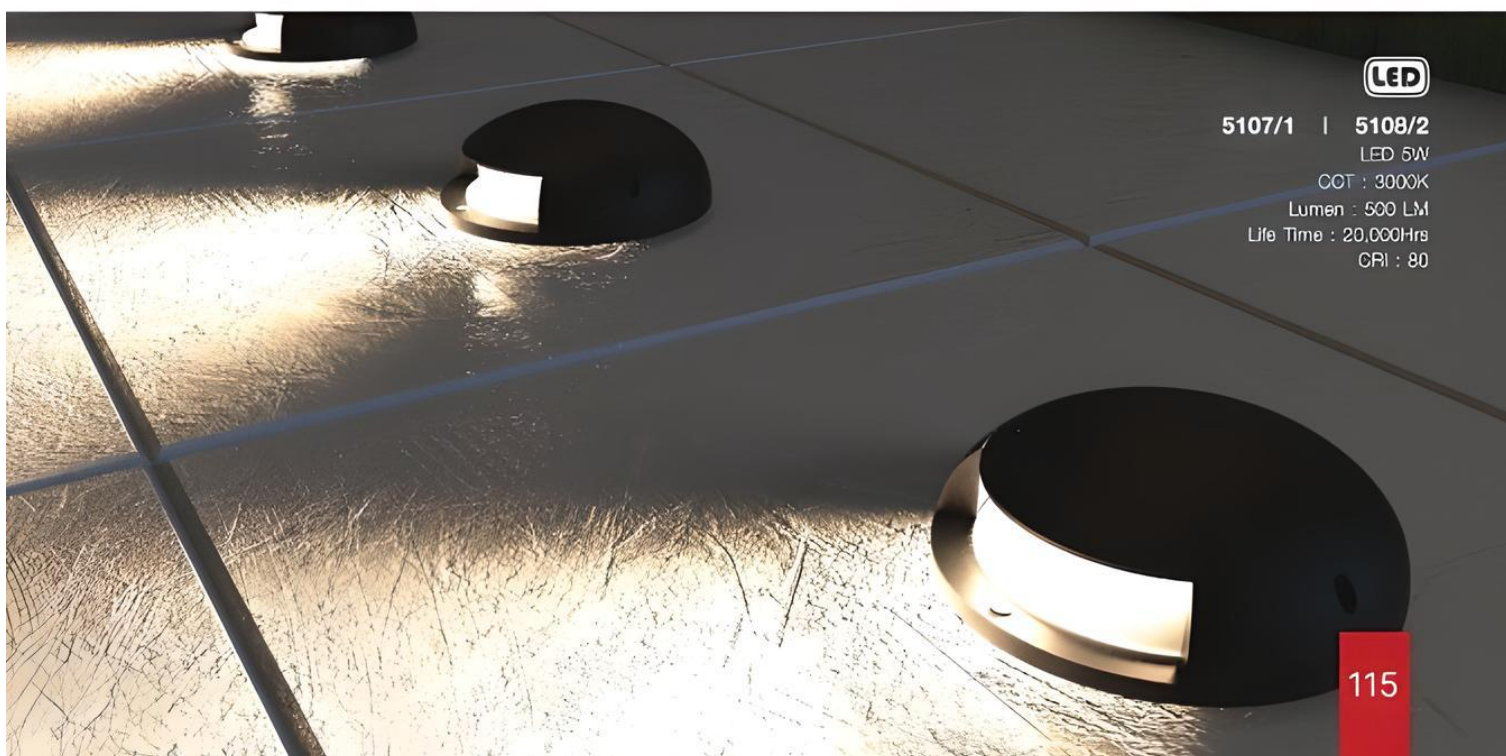


LED
5107/1 | 5108/2
LED 5W
CCT : 3000K
Lumen : 500 LM
Life Time : 20,000Hrs
CRI : 80



Socket : **E27**

IP67

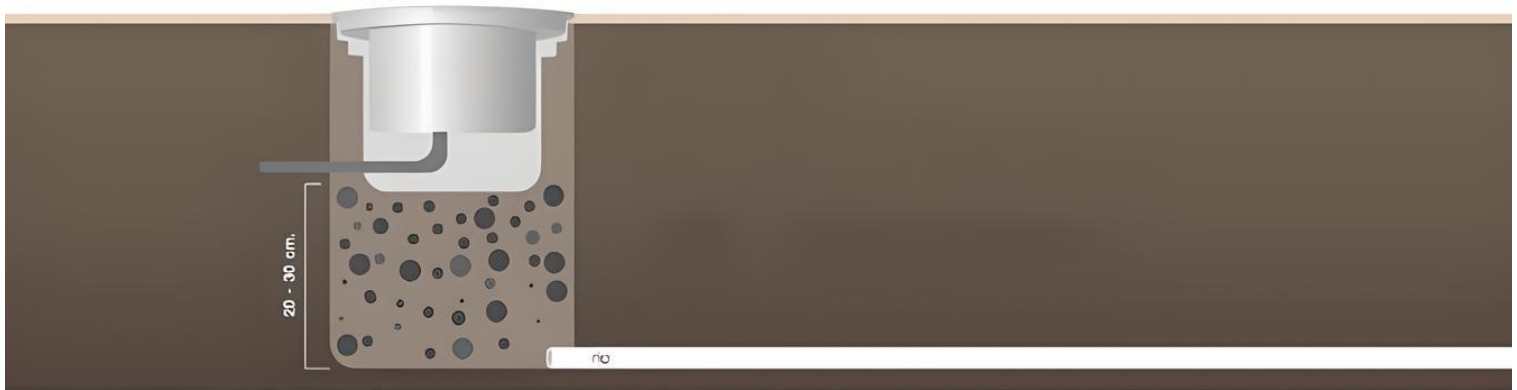

In Ground Uplight.